


Ilio - 3000K - App Compatible

Ernesto Gismondi



IP20    Dimmerable: 

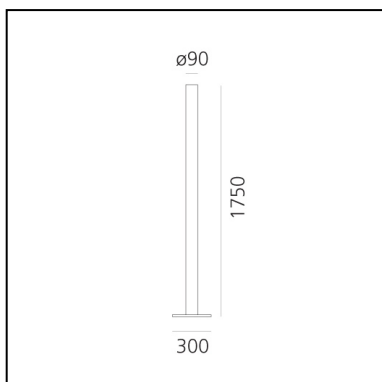

LUMINAIRE

- Watt: **45W**
- Voltage: **220-240V**
- Delivered lumens output: **3564lm**
- CCT: **3000K**
- Efficiency: **88%**
- Efficacy: **79.20lm/W**
- CRI: **90**
- Dimmer Typology: **Microswitch Dimmer**

Notes





Accessories Device for switching and controlling Artemide App products. Max N.3 inputs for external push buttons. Mains power supply required. To be installed inside flush mounting boxes or junction boxes. DV1080APP



DESCRIPTION

With simple geometry, stripped of all formal digressions and reduced to its basics, Ilio draws attention through saturated colour, available in 7 variations. A mono-material aluminium cylinder supports a 39W LED optical engine on the top, which produces high-efficiency diffused indirect light emissions. With a flow of more than 2700 lumen and an 80% yield, it ensures the general lighting of a room. With light regulator configured to controlled socket, dimmer microswitch.

PRODUCT CODE:

-  **1640080APP - Matt Black**
-  **1640020APP - White**
-  **1640030APP - Glossy Black**
-  **1640010APP - Rubin Red**



FEATURES

- Article Code: **1640080APP**
- Colour: **Matte Black**
- Installation: **Floor**
- Material: **Aluminium, steel**
- Series: **Design Collection**
- Environment: **Indoor**
- Area contract: **Hospitality, Residential**
- Emission: **Indirect**
- design by: **Ernesto Gismondi**

DIMENSIONS

- Height: **cm 175**
- Diameter: **cm 9**
- Base Length: **cm 30**
- Base Width: **cm 30**
- Impact Resistance: **N.D.**
- Glow Wire Test: **750°**

SOURCES INCLUDED

- Category: **Led**
- Number: **1**
- Watt: **37W**
- Delivered lumens output: **3899lm**
- Color temperature (K): **3000K**
- CRI: **90**
- Color Tolerance: **MacAdam 2SDCM**
- Efficacy: **107lm/W**
- Service Life: **50000-L70**