

Arrangements Line

■ F0401030 - Black

Designed by Michael Anastassiades


Diffuse light suspended lighting device. Body in extruded, curved NC-machined and black powder-coated aluminium, diffuser in platinum optical silicone.

Each component can be connected to the power pack by means of an electrical and mechanical connection system designed for customisable product set-up.

Roses available with two powers: lamp with power under 70W and lamp with power under 190W. Class III roses also available for installations with remote power supply: "surface" version for installations on cement, "recessed" version for plasterboard ceilings.

The electronics integrated in the rose enables use of dimming systems: push, 1-10, potentiometer, DALI. In the absence of these systems, the light flow can be set with the push system included in the rose.

Cable length 2.4m




Main specifications

Mounting	Suspension	Lamp holder	LED Module
Environment	Indoor dry location	Dimmable	Yes
Light source type	LED	Autoprotected Lamp	No
Light source replaceable	Replaceable (LED only) light source by a professional	Number of heads	1
LED type	LED Module	Source Power (W)	29
System Flux (lm)	1480		

Optical

Lighting Type	Direct
Lighting distribution	Symmetric
CCT (K)	2700K
Cold Beam Lighting	No
Extreme Cut off	No

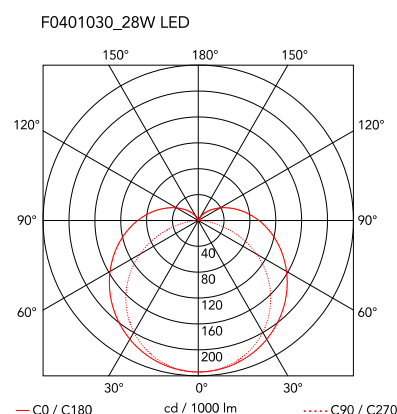

Electrical


Insulation class	III	Batteries Inside	No
Frequency (Hz)	50/60	Dimming Interface	Remote
Main Voltage (Vac)	48		Dimmable
Driver	Remote		(Dimmer Not Included)
Dimmable	Yes	Cord length (mm)	2500
		Charging Min Time	No

Physical


Colour	Black
Net weight (kg)	0.6
Gross weight (kg)	1.32
IP	20
IP external	20



Arrangements Line



Arrangements Small Rose
F0416030



Arrangements Big Rose
F0415030



**Arrangements Recessed
Rose**
F0418030