




Abient Thumbnail

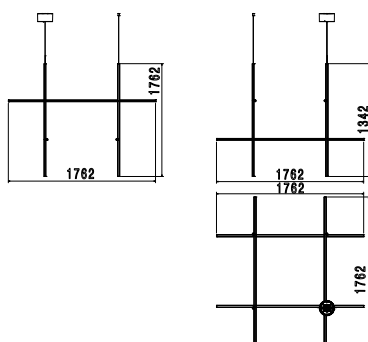

## Coordinates Module Suspension

■ F1880044 - Anodized Champagne

Designed by Michael Anastassiades

Coordinates is a lighting system with diffuse light composed of horizontal and vertical luminaries arranged in a bright grid of various shapes and complexities. Each element is made of extruded anodized aluminium with a champagne finish and a diffuser in platinum optical silicone with an integrated LED strip (CRI 95). Each element is powered and supported by an invisible electrical and mechanical connection designed specifically to allow for the composition of the 4 hanging models (S1, S2, S3, S4) with 2.5-m cables. The 'S Module' is also available. Its geometry was designed to be repeated to create large grids for custom installations. Each Coordinates configuration includes its own ceiling rose, whose integrated electronics allow for the use of different dimmer systems: push, 1-10, DALI. In the absence of these systems, the amount of light can be set during installation with the push system included in the rose. The related CI III version is also available for each configuration for installations with a remote power supply.


### Main specifications

<b>Mounting</b>	Suspension	<b>Lamp holder</b>	LED Module
<b>Environment</b>	Indoor dry location	<b>Autoprotected Lamp</b>	No
<b>Light source type</b>	LED	<b>Source Power (W)</b>	180
<b>Light source replaceable</b>	Replaceable (LED only) light source by a professional LED Module	<b>Source Flux (lm)</b>	10230
		<b>System Flux (lm)</b>	10230

### LED type

### Optical

<b>Lighting Type</b>	Total
<b>Lighting distribution</b>	Asymmetric
<b>CCT (K)</b>	2700
<b>CRI&gt;</b>	90
<b>Cold Beam Lighting</b>	No
<b>Extreme Cut off</b>	No

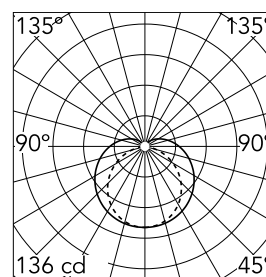

Luminous flux luminaire  
591 lm

### Electrical

<b>Insulation class</b>	I	<b>Batteries Inside</b>	No
<b>Frequency (Hz)</b>	50/60	<b>Power supply replaceable</b>	Replaceable control gear by a professional
<b>Main Voltage (Vac)</b>	100-240		2400
<b>Driver</b>	Integrated	<b>Cord length (mm)</b>	
<b>Dimmable type</b>	Dimmable 0-10V, Dimmable Push, Dimmable 1-10V, Dimmable DALI 1		

### Physical

<b>Colour</b>	Anodized Champagne	<b>IP external</b>	20
<b>Length (mm)</b>	1762		
<b>Net weight (kg)</b>	8.7		
<b>Gross weight (kg)</b>	19.18		
<b>IP</b>	20		